



## 35 500 000 GROHE RAPIDO T THERMOSTATIC MIXER FOR CONCEALED INSTALLATION

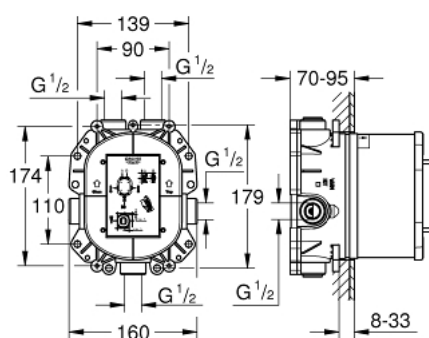

### PRODUCT DESCRIPTION

- for use with Grohtherm Special and Grohtherm F
- Without finishing trim set
- Flat installation depth 70 - 95 mm
- Easy to install, premounted and tested unit
- GROHE TurboStat Compact cartridge with wax thermoelement
- Two top outlets 1/2", lockable
- High flow rate up to 50 l/min. by use of three outlets
- 1/2" bottom outlet (can only be used with separate shut-off valve)
- Safe to install, stable built-in-box and protective cap
- Mounting options for solid walls and dry walls
- Material for wall sealing included
- Aquadimmer-diverter for bath mixer or stop valve for shower mixer in finishing trim set
- body of DR brass
- Built-in check valve with dirt strainer
- GROHE Water Saving - Less water, perfect flow
- min. recommended pressure 1.0 bar

## 35 500 000 GROHE RAPIDO T THERMOSTATIC MIXER FOR CONCEALED INSTALLATION

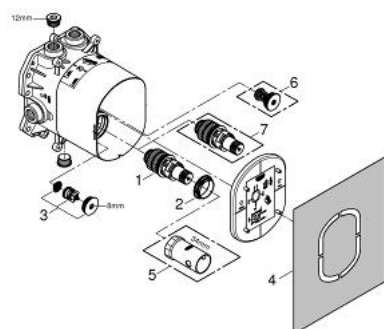

### SPARE PARTS, November 2005 – now

- 1: 3/4" Thermostatic compact cartridge (Spare part-nr. 47483000)
  - 2: Fitting ring (Spare part-nr. 47765000)
  - 3: Non-return valve (Spare part-nr. 47753000)
  - 4: Seal kit (Spare part-nr. 48263000)
  - 5: Socket Spanner (Spare part-nr. 19332000)\*
  - 6: Safety Combination (EN 1717) (Spare part-nr. 29007000)\*
  - 7: 3/4" Thermostatic compact cartridge (Spare part-nr. 47186000)\*
- \* Optional accessories